



Scissor Lift (Electric)

Scissor Lift (Electric E-Drive)

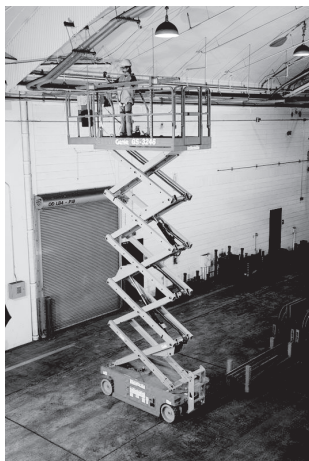

Dimensions

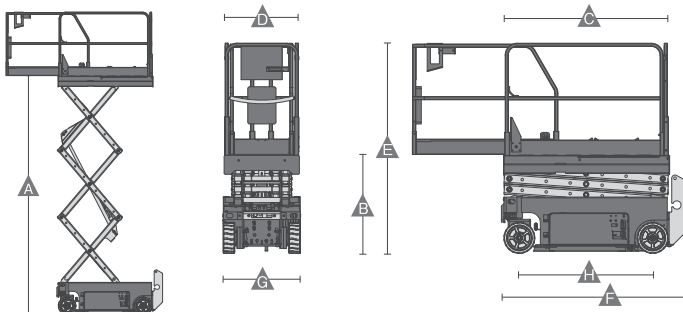

Specifications


Make	Model	SKYJACK	GENIE					
		SJ3219E	GS1932m E-Drive	GS1930 E-Drive	GS2646 E-Drive	GS3246 E-Drive	GS4046 E-Drive	GS4655 E-Drive
Max. Working Height (m)		7.48	7.55	7.85	9.96	11.78	13.94	15.95
Max. Platform Height (m)	A	5.48	5.55	5.85	7.96	9.78	11.94	13.95
Platform Height Stowed (m)	B	1.04	0.87	1.04	1.20	1.32	1.45	1.64
Platform Length-Outside (m)	C	1.54	1.40	1.66	2.26	2.26	2.26	2.84
Slide-Out Platform Extension Deck (m)		0.91	0.06	0.91	0.91	0.91	0.91	1.22
Platform Width-Outside (m)	D	0.81	0.77	0.76	1.16	1.16	1.16	1.35
Guardrail Height (m)		1.10	1.10	1.10	1.10	1.10	1.10	1.10
Height-Stowed: Folded Guardrails (m)	E	2.13	1.97	2.16	2.32	2.43	2.57	2.77
Length-Stowed (m)	F	1.80	1.40	1.83	2.44	2.44	2.48	3.11
Width (m)	G	0.64	0.81	0.76	1.16	1.16	1.18	1.41
Wheelbase (m)	H	1.37	1.12	1.32	1.85	1.85	1.85	2.47
Safe Working Load (kg)		227	227	227	454	454	350	350
Weight (kg)		1,468	1,179	1,456	1,971	1,971	3,117	3,701
Power Source		Battery						

- ▶ Reduce Oil Leakage
- ▶ Fewer Hoses and Fittings
- ▶ Increase in Runtime and Efficiency

※Machine specifications may change depending on manufacturing year.
Please request the newest catalogue for each model from Sales.

Scissor Lift (Electric)

Dimensions

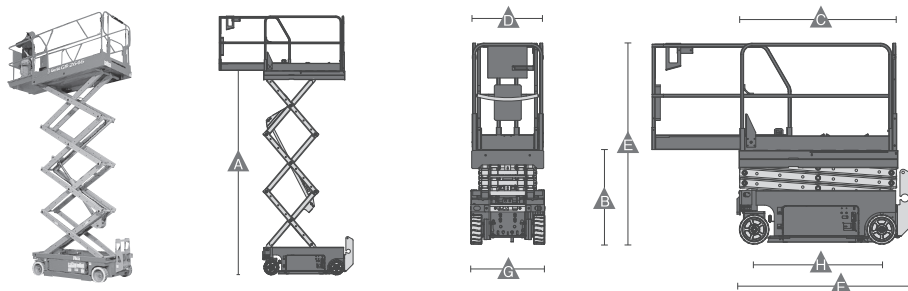

Specifications

Make	GENIE	SKYJACK	GENIE	GENIE	GENIE	GENIE	GENIE	SKYJACK	GENIE	GENIE
Model	GS1930	SJ3219	GS1932	GS2032	GS2046	GS2632	GS2646	SJ4732	GS3246	GS4047
Max. Working Height (m)	7.79	7.79	7.85	7.92	8.10	9.80	9.80	11.65	11.75	13.94
Max. Platform Height (m)	A	5.79	5.79	5.85	5.92	6.10	7.80	7.80	9.65	11.94
Platform Height Stowed (m)	B	1.00	0.99	1.04	1.03	1.04	1.16	1.16	1.27	1.43
Platform Length-Outside (m)	C	1.63	1.78	1.66	2.26	2.26	2.26	N/A	2.26	2.26
Slide-Out Platform: Extension Deck (m)		0.91	0.91	0.91	0.91	0.91	0.91	1.22	0.91	0.91
Platform Width-Outside (m)	D	0.74	0.81	0.76	0.81	1.15	0.81	1.15	1.07	1.15
Guardrail Height (m)		0.99	1.10	1.10	0.99	1.09	1.10	N/A	1.09	1.10
Height-Stowed: Folded Guardrails (m)	E	2.11	1.99	1.80	2.13	2.13	2.26	2.26	2.39	2.55
Length-Stowed (m)	F	1.83	1.78	1.83	2.44	2.41	2.41	2.44	2.32	2.41
Width (m)	G	0.76	0.81	0.82	0.81	1.17	0.81	1.17	1.19	1.20
Wheelbase (m)	H	1.32	1.40	1.32	1.85	1.85	1.85	1.85	1.19	1.85
Safe Working Load (kg)		227	227	227	353	544	227	454	318	350
Weight (kg)		1,226	1,476	1,329	2,027	1,974	1,959	1,983	2,571	3,222
Power Source	Battery									

※Machine specifications may change depending on manufacturing year.
Please request the newest catalogue for each model from Sales.