


Elevating Rolling Tower· Manual Scissor Lift· Mobile Stage

Elevating Rolling Tower

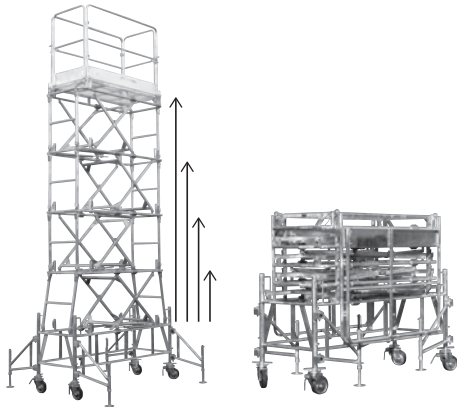


Specifications

Model		SH0-36	US-36	US-42	US-43
Platform size (mm)	Length	1,300	1,500	1,500	1,500
	Width	590	590	590	590
Guard Rail Height (mm)		907	920	920	920
Working Height/ Platform Height (mm)	Level 1	3,400 / 1,400	3,370 / 1,370	3,965 / 1,965	3,590 / 1,590
	Level 2	3,960 / 1,960	3,930 / 1,930	4,525 / 2,525	4,170 / 2,170
	Level 3	4,510 / 2,510	4,510 / 2,510	5,105 / 3,105	4,750 / 2,750
	Level 4	5,060 / 3,060	5,090 / 3,090	5,685 / 3,685	5,330 / 3,330
	Level 5	5,600 / 3,600	5,600 / 3,600	6,195 / 4,195	5,840 / 3,840
	Level 6	x	x	x	6,350 / 4,350
Safe Working Load (kg)		120	133	133	133
Weight (kg)		210	192	260	240
Elevating		Manual	Manual	Manual	Manual
Wheel Size		Ø150	Ø150	Ø150	Ø150

Manual Scissor Lift



Dimensions

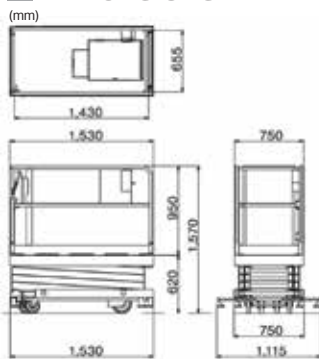


Specifications

Make	AIRMAN
Model	ENHL046
Max. Platform Lifting Height (mm)	4,600
Min. Platform Lifting Height (mm)	620
Max. Load (kg)	150
Platform Dimensions L x W x H (mm)	1,430 x 655 x 950
Machine Dimensions L x W x H (mm)	1,530 x 750 x 1,570
Machine Weight (kg)	430
Input Power Supply (V)	Single AC 100~110 / 200~240
Battery	Deep Cycle Battery x 1

※ L x W x H: Length x Width x Height


Mobile Stage

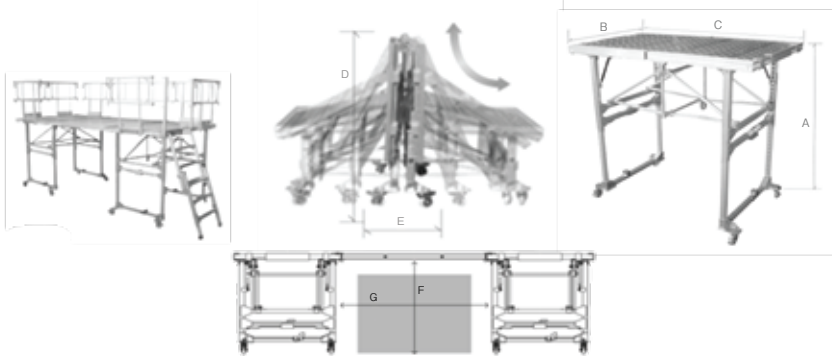

Specifications

Model	MKT-1750
Stage Height (mm)	A 1,145 - 1,765
Stage Dimension (mm)	B x C 1,100 x 1,785
Storage Dimension (mm)	D 1,740
	B 1,100
	E 526
Max. Working Mass (kg)	200
Weight (kg)	65
Space Dimension (mm)	F 1,082 - 1,702
	G 1,495

Mobile Stage Option

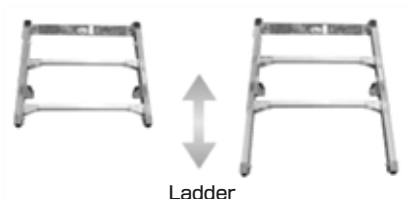

Pole



Dimensions

Option name	Model	Dimension (mm)			Weight (kg)
		L	H	W	
Bridge Plate	MKTB-SML	1,700	-	440	7.8
Guard Rail	MKTT-SML	-	980	895	4.0
Guard Rail Link	MKTR-ML	1,858	-	468	3.0
Ladder	MKTH-M	1,145 - 1,765	746		8.0
Pole	MKTP-ML	-	992	102	1.2

※ L x H x W: Length x Height x Width