



Articulated Boomlift (Engine)

Articulated Boomlift (Engine)


● Z34/22IC

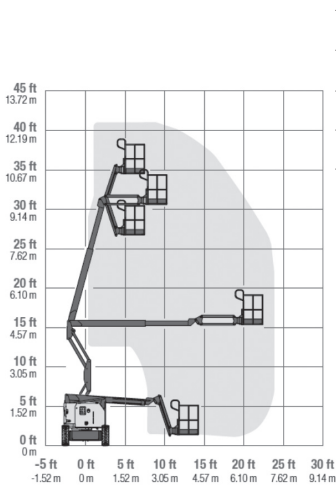


● Z45/25

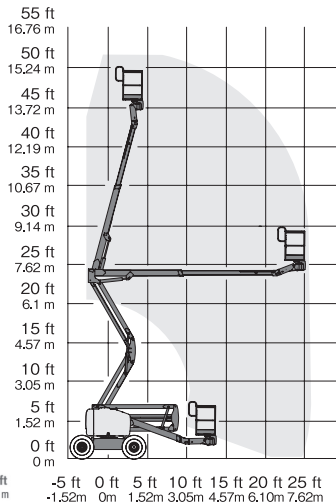

● Z60/34

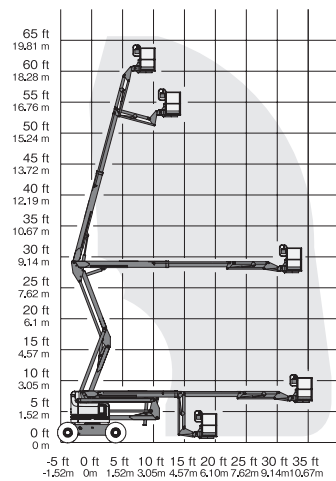


● Z62/40


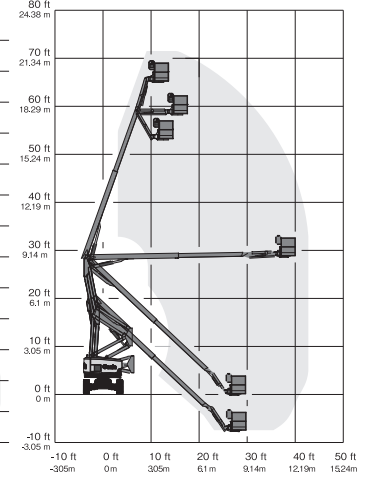


Z45/25

● Z80/60

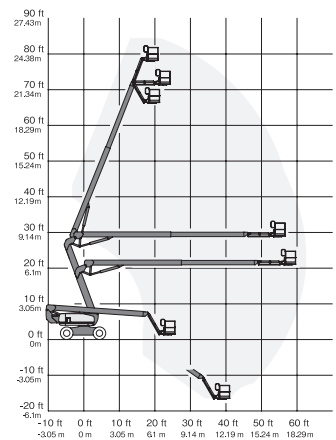

● Z135/70

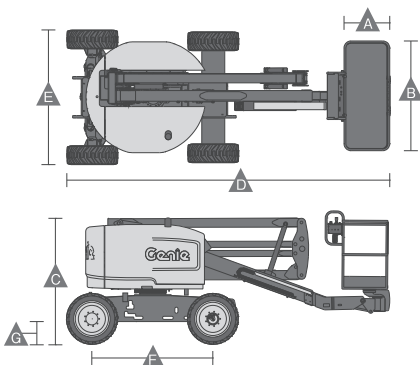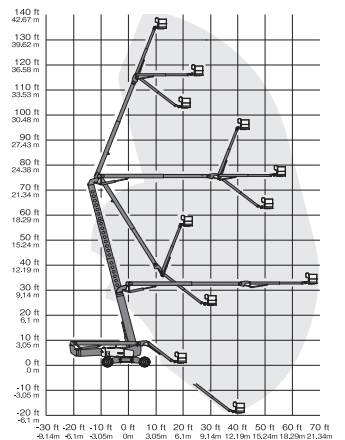

Specifications

Model	Z34/22IC	Z45/25	Z60/34	Z62/40	Z80/60	Z135/70
Max. Working Height (mm)	12.54	15.86	20.39	20.87	25.77	43.15
Max. Platform Height (mm)	10.54	13.86	18.39	18.87	23.77	41.15
Max. Horizontal Reach (m)	6.78	7.62	11.05	12.42	18.29	21.26
Safe Working Load (kg)	227	227	227	227	227	272
Platform Length (m)	A	0.76	0.76	0.91	0.91	0.91
Platform Width (m)	B	1.42	1.83	2.44	2.44	2.44
Height-Stowed (m)	C	2.06	2.13	2.69	2.56	3.00
Length-Stowed (m)	D	5.66	6.65	8.15	9.25	11.27
Width (m)	E	1.85	2.29	2.46	2.49	3.94
Wheel Base (m)	F	1.88	2.03	2.51	2.51	4.11
Ground Clearance-Center (m)	G	0.17	0.39	0.41	0.37	0.3
Weight (kg)	4,740	6,460	10,215	10,430	17,010	20,366
Power Source	Diesel Engine					

*Machine specifications may change depending on manufacturing year.
Please request the newest catalogue for each model from Sales.