


# Elevating Rolling Tower · Manual Scissor Lift · Mobile Stage

## Elevating Rolling Tower

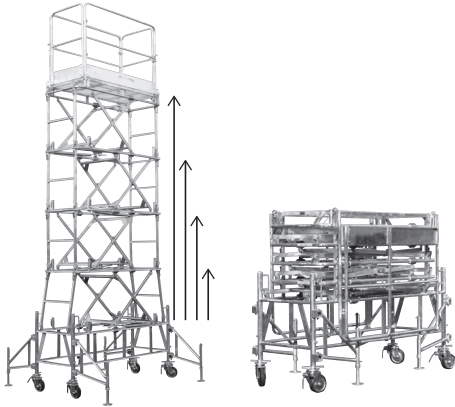


### Specifications

Model		SH0-36	US-36	US-42	US-43
Platform size (mm)	Length	1,300	1,500	1,500	1,500
	Width	590	590	590	590
Guard Rail Height (mm)		907	920	920	920
Working Height/ Platform Height (mm)	Level 1	3,400 / 1,400	3,370 / 1,370	3,965 / 1,965	3,590 / 1,590
	Level 2	3,960 / 1,960	3,930 / 1,930	4,525 / 2,525	4,170 / 2,170
	Level 3	4,510 / 2,510	4,510 / 2,510	5,105 / 3,105	4,750 / 2,750
	Level 4	5,060 / 3,060	5,090 / 3,090	5,685 / 3,685	5,330 / 3,330
	Level 5	5,600 / 3,600	5,600 / 3,600	6,195 / 4,195	5,840 / 3,840
	Level 6	x	x	x	6,350 / 4,350
Safe Working Load (kg)		120	133	133	133
Weight (kg)		210	192	260	240
Elevating		Manual	Manual	Manual	Manual
Wheel Size		Ø150	Ø150	Ø150	Ø150

## Manual Scissor Lift



### Dimensions (mm)

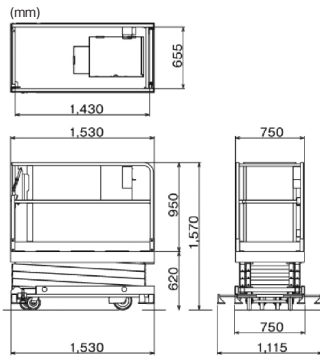


### Specifications

Make	AIRMAN
Model	ENHL046
Max. Platform Lifting Height (mm)	4,600
Min. Platform Lifting Height (mm)	620
Max. Load (kg)	150
Platform Dimensions L x W x H (mm)	1,430 x 655 x 950
Machine Dimensions L x W x H (mm)	1,530 x 750 x 1,570
Machine Weight (kg)	430
Input Power Supply (V)	Single AC 100~110 / 200~240
Battery	Deep Cycle Battery x 1

※ L x W x H: Length x Width x Height

## Mobile Stage

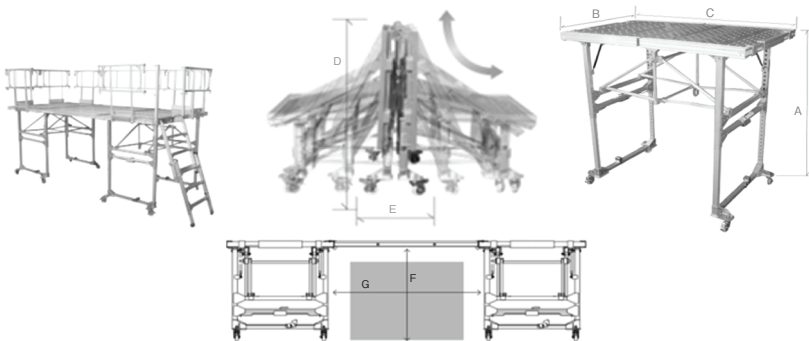

### Specifications

Model	MKT-1750
Stage Height (mm)	A 1,145 - 1,765
Stage Dimension (mm)	B x C 1,100 x 1,785
Storage Dimension (mm)	D 1,740
	B 1,100
	E 526
Max. Working Mass (kg)	200
Weight (kg)	65
Space Dimension (mm)	F 1,082 - 1,702
	G 1,495

### Mobile Stage Option



### Dimensions

Option name	Model	Dimension (mm)			Weight (kg)
		L	H	W	
Bridge Plate	MKTB-SML	1,700	-	440	7.8
Guard Rail	MKTT-SML	-	980	895	4.0
Guard Rail Link	MKTR-ML	1,858	-	468	3.0
Ladder	MKTH-M	1,145 - 1,765	746	-	8.0
Pole	MKTP-ML	-	992	102	1.2

※ L x H x W: Length x Height x Width